DUAL TF DBC® SST

Height: 35.7" Width: 21.8" Depth: 23.8" (90.7cm) (60.5cm) (55.4cm)



- Brews 16.3 to 18.9gal (61.7 to 71.5L) of perfect coffee per hour
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the BrewWISE Recipe Writer using your PC (Windows® compatible).
- · Easy pulse interface allows automatic programming of pulse routine
- Preventive maintenance kit: 39641.0000
- SplashGard® funnel and optional funnel locks help improve safety
- Stores individual coffee recipes so operator can easily brew many varieties
- ThermoFresh® servers are vacuum insulated to keep coffee hot for hours.
- Energy saver mode reduces tank temperature during idle periods
- · Operate any combination of BrewWISE equipment error-free with wireless brewergrinder interface through Smart Funnel with SplashGard®
- · Servers not included unless otherwise noted

Server(s) sold separately

Agency:





Specifications

Funnel: Smart Funnel

Water Access: Plumbed Faucet: Lower

Interface: Wireless Finish: Stainless

Additional Features

BrewWISE

Electrical & Capacity

220-240	27.0-29.5	6000-7100	No	-	283	60°F (15.5°C)	1	2	50-60
Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


ridifibility requirements							
PSI kPa		Fitting Supplied	Water Flow Required (GPM)				
20-90	138-621	3/8" Male Flare Fitting	-				


CAD Drawings

2D	Revit	KLC		
•				

MARNING:





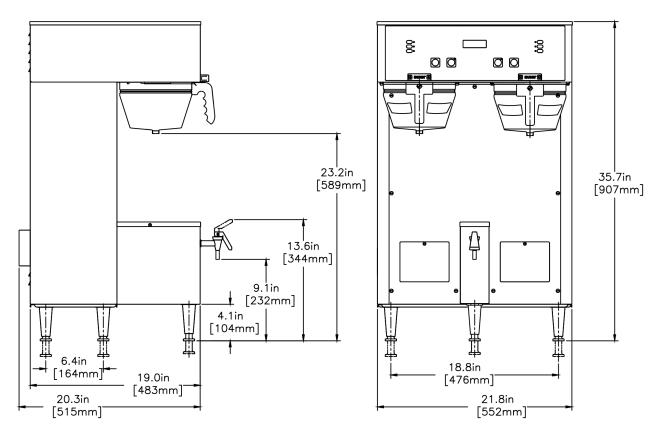

	Unit			Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	35.7 in.	21.8 in.	23.8 in.	38.8 in.	24.7 in.	25.9 in.	92.200 lbs	14.360 ft ³
Metric	90.7 cm	55.4 cm	60.5 cm	98.4 cm	62.7 cm	65.9 cm	41.822 kgs	0.407 m³



Related Products & Accessories: DUAL TF DBC® SST(34600.0011)




FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000



FUNNEL ASSY, W/ **INSERTS SMTF**

Product #: 32643.0000



CARD ASSY, RECIPE TRANSFER (BRW)

Product #: 34447.0016



MHGA, CE IPX1 EURO 220-240V BLK 50HZ

Product #: 35600.0023



Product #: 39000.0002





Product #: 56000.0002















Serving & Holding Options: DUAL TF DBC® SST(34600.0011)



TF SERVER, DSG2 1G/3.8L

Product #:42700.0000



TF SERVER, DSG2 1.5G SST

Product #:42750.0000



TF SERVER, DSG2 1.5G BLK

Product #:42750.0001



TF SERVER, DSG2 1.5G CD

Product #:42750.0003



TF SERVER, 1G/3.8L MECH

Product #:44000.0000



TF SERVER, 1.5G/5.7L MECH

Product #:44050.0000



TF SERVER, 1.5G/5.7L MECH BLK

Product #:44050.0001

