


ICBA SH, Stainless

Height: 32.8" Width: 11.8" Depth: 23.2"
(83.3cm) (30.0cm) (58.9cm)



 Server(s) sold separately

- Sleek modernized design language, with rounded angles on the corners and trunk
 - Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
 - BUNN Infusion Series technology allows for multiple recipes from one footprint --- with three brew buttons and three batch sizes
 - Energy-saver mode reduces tank temperature during idle periods
 - Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
 - Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
 - USB programming capable
 - Brew counter keeps track of how many batches are brewed
 - Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
 - New Soft Heat® servers [sold separately] are ergonomic, lighter weight, energy efficient and now offer programmable recipe/batch based holding times and temperatures, alerting staff when freshness has expired or server is empty
 - PROP 65 Warning Decal included in packaging with equipment
 - Servers not included unless otherwise noted
- Agency:



Specifications

Product #: 51100.0500

Faucet: Side

Water Access: Plumbed

Legs: 4" Satin Nickel Legs

Finish: Stainless

Funnel: Smart Funnel

Additional Features

BrewWISE

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ₂ O Temp.	Phase	# Wires plus Ground	Hertz
220-240	13.2-14.1	2900-3400	Yes	EURO 16A	163	60°F (15.5°C)	1	2	50-60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" Male Flare Fitting	1.00

 **WARNING:**


CAD Drawings

2D	Revit	KLC
●		



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
10/06/2021

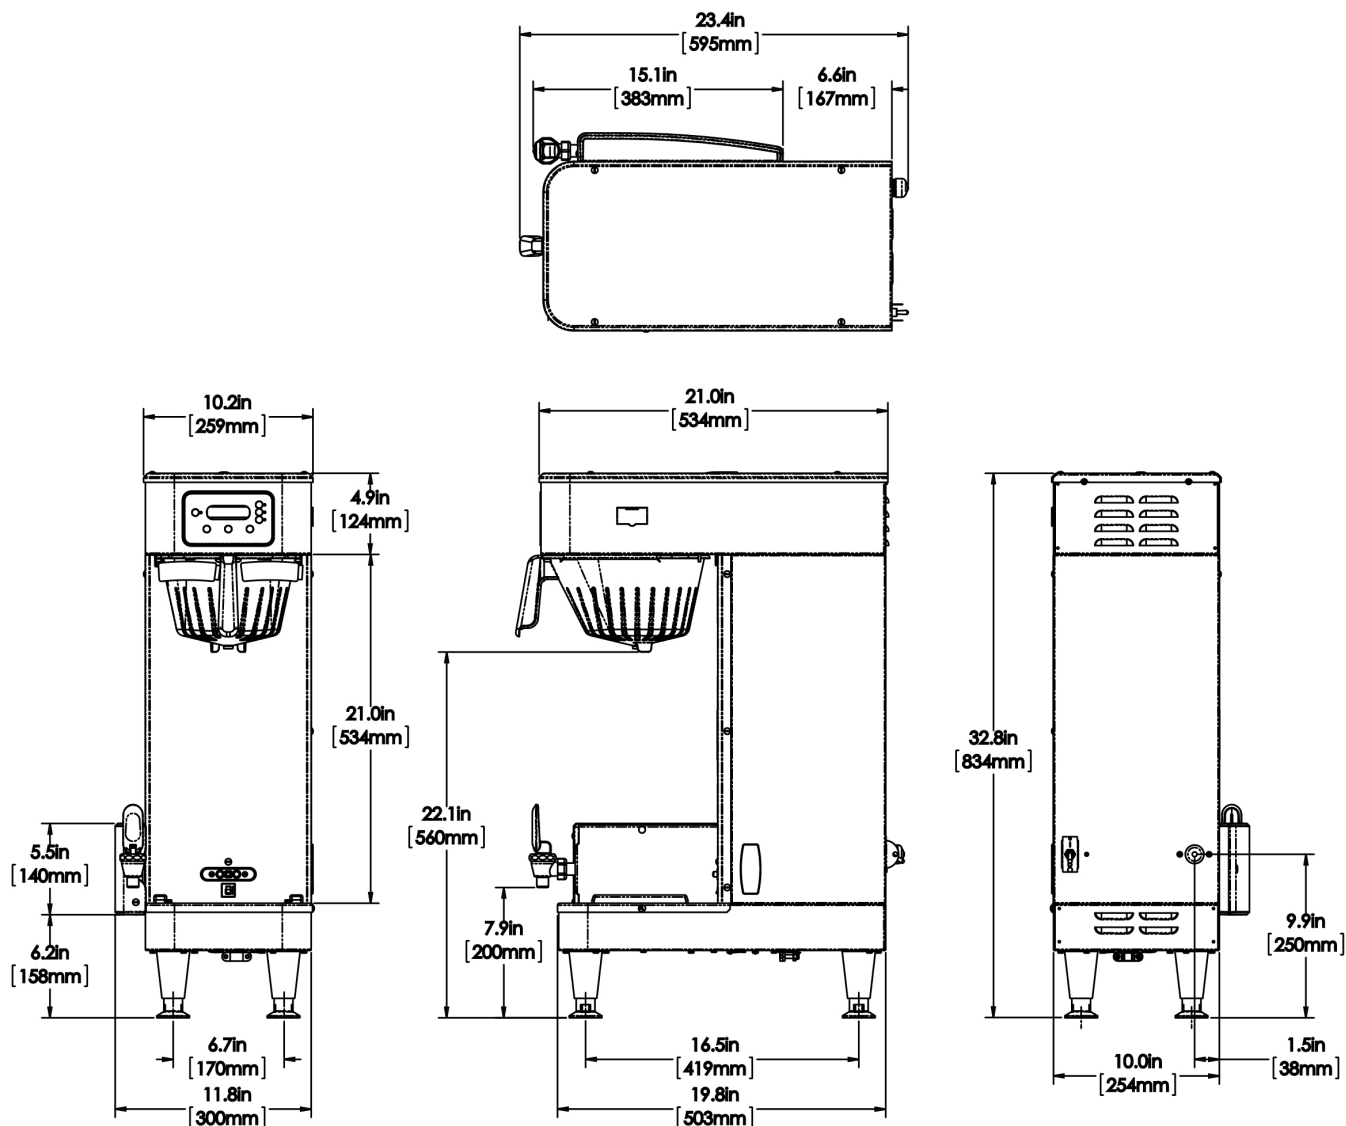

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	32.8 in.	11.8 in.	23.2 in.	37.4 in.	15.3 in.	28.6 in.	64.860 lbs	9.442 ft³
Metric	83.3 cm	30.0 cm	58.9 cm	94.9 cm	38.7 cm	72.7 cm	29.420 kgs	0.267 m³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
10/06/2021

Related Products & Accessories:ICBA SH, Stainless(51100.0500)



1SH STAND, CE
220-240V INF SERIES

Product #: 27825.0300



2SH STAND, CE
220-240V INF SERIES

Product #: 27875.0300



KIT, DRIP TRAY INF
TWIN SH

Product #: 53452.0000



KIT, DRIP TRAY SINGLE
SH

Product #: 53452.0001

Serving & Holding Options: ICBA SH, Stainless(51100.0500)



SH SERVER, 1.5G/5.7L
INF SERIES

Product #:27850.0200



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
10/06/2021